

Set USB Serial Device (FTDI FT232Rchip set)

Typical USB Serial Device (FTDI chip set) (Microsoft ® Windows ® XP)

The following screens display the configuration steps

- Right click on My Computer and select Properties.

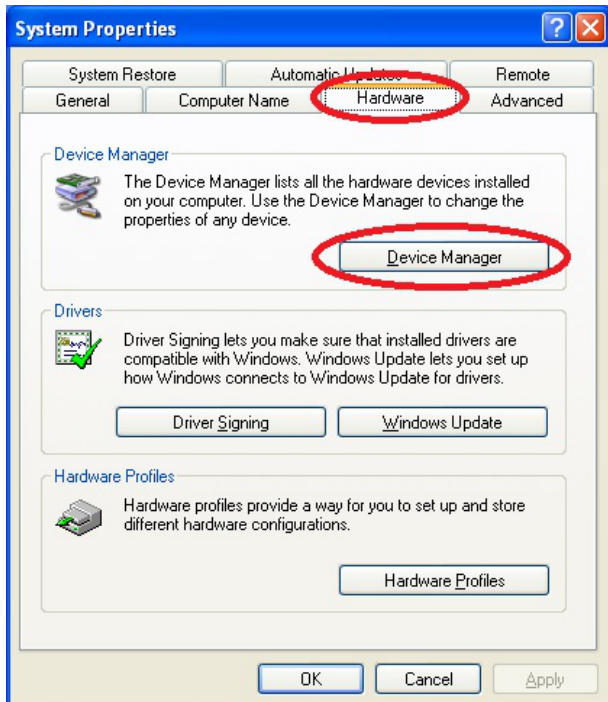


Figure 1

- Select Hardware | Device Manager.

If you receive a message that states that you have insufficient security privileges to uninstall devices, change device properties or device driver, then you must contact your site administrator or logout/login again as administrator and try again.



Figure 2

- Locate Ports(COM & LPT).
- Right click on desired USB Serial Port and select Properties

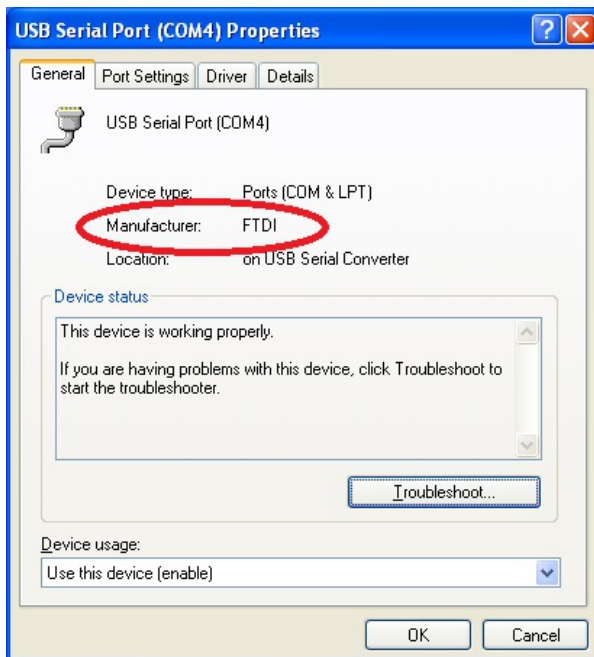


Figure 3

- Make sure that the Manufacturer says FTDI.
- Select Port Settings

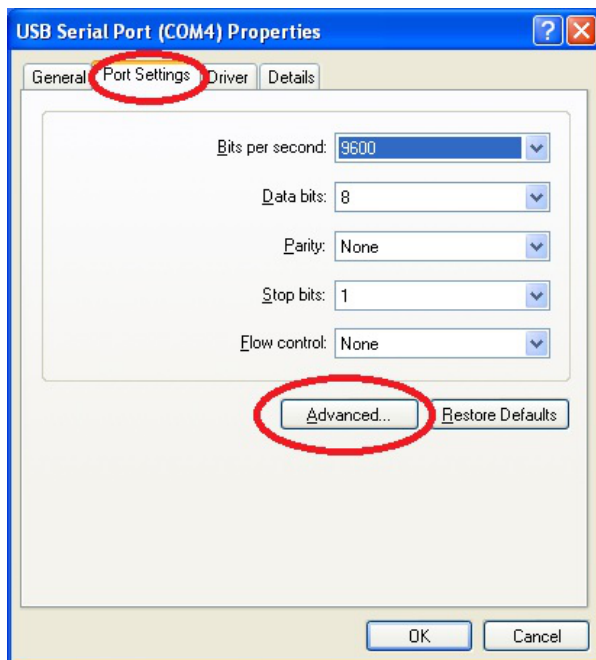


Figure 4

- Press the Advanced button.

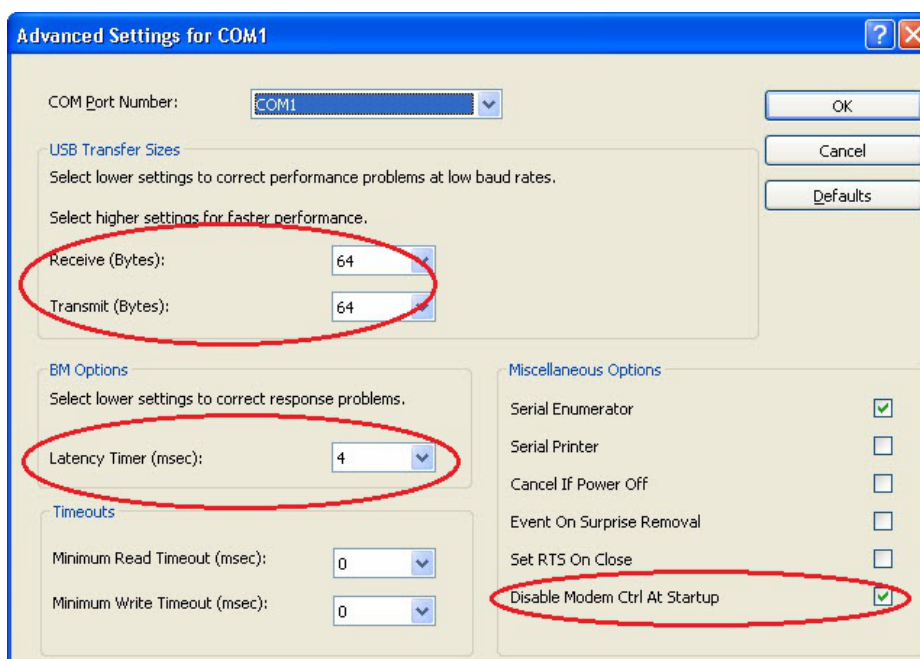


Figure 5

- Locate USB Transfer Sizes - Receive and set the value to "64".
- Locate USB Transfer Sizes - Transmit and set the value to "64".
- Locate Latency Timer and set the value to "4".
- Locate Disable Modem Ctrl At Startup and set the value to true (checked).
- Press the OK button. The window will close.

Press the OK button on the Properties window. The changed setting is now saved. The window will close.

- Close the other forms.

Typical USB Serial Device (FTDI chip set) (Microsoft® Windows® 7/8 32-bit/64-bit)

The following screens display the configuration steps.

- Right click on Computer and select Properties.

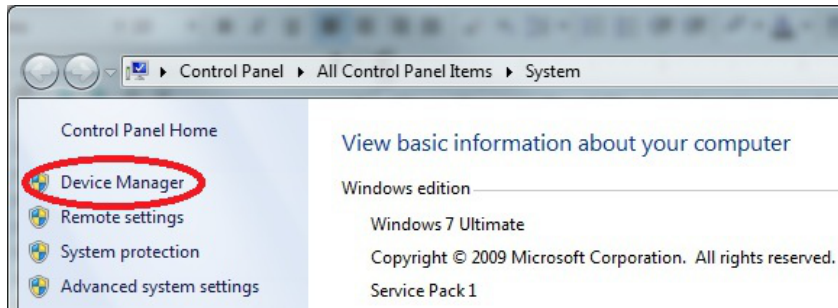


Figure 6

- Select Hardware | Device Manager.

If you receive a message that states that you have insufficient security privileges to uninstall devices, change device properties or device driver, then you must contact your site administrator or logout/login again as administrator and try again.

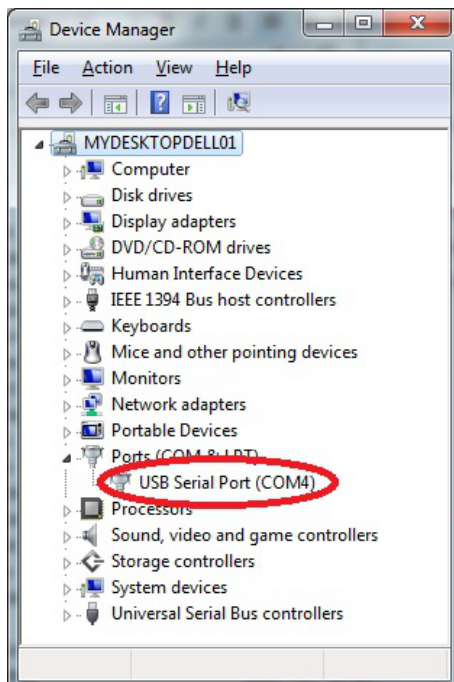


Figure 7

- Locate Ports (COM & LPT).
- Right click on desired USB Serial Port and select Properties.

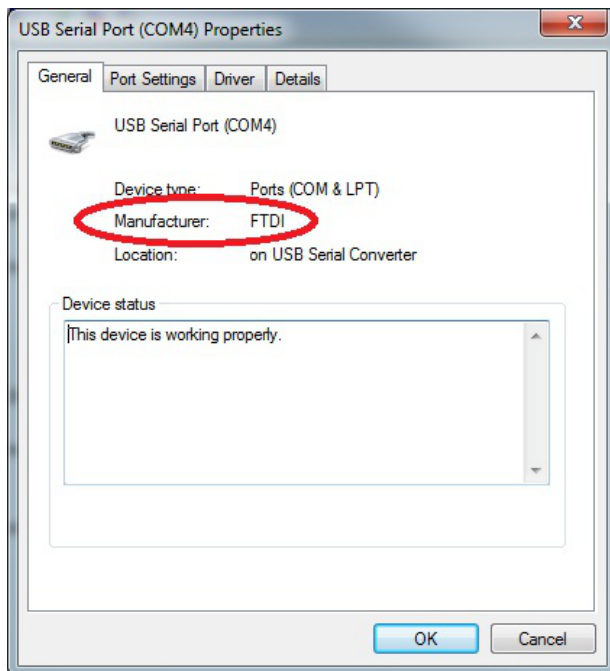


Figure 8

- Make sure that the Manufacturer says FTDI.
- Select Port Settings.

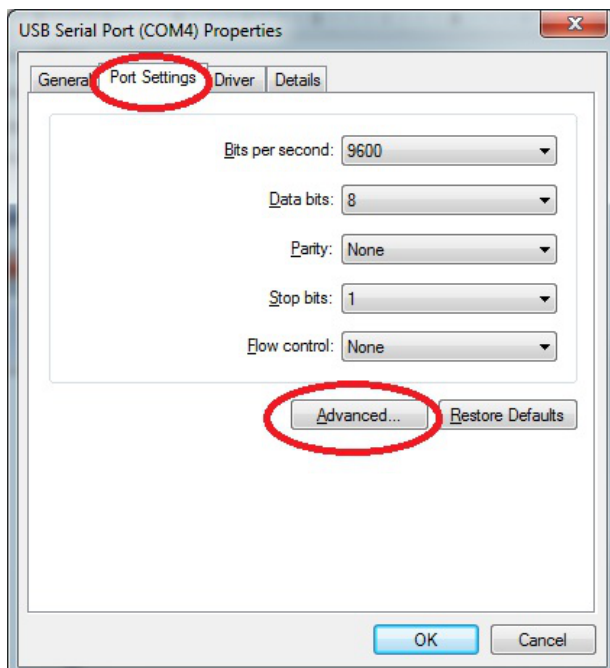


Figure 9

- Press the Advanced button.

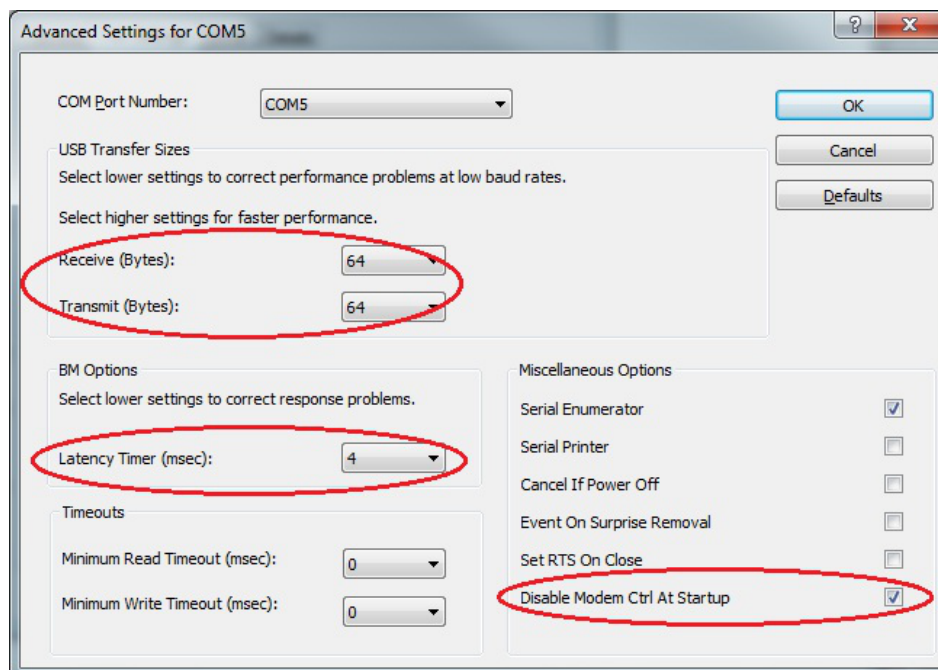


Figure 10

- Locate USB Transfer Sizes - Receive and set the value to "64".
- Locate USB Transfer Sizes - Transmit and set the value to "64".
- Locate Latency Timer and set the value to "4".
- Locate Disable Modem Ctrl At Startup and set the value to true (checked).
- Press the OK button. The window will close.
- Press the OK button on the Properties window. The changed setting is now saved. The window will close.
- Close the other forms.